

MJG STARTERS


1. Remove plastic cover from end.




2. Separate wires.




3. Insert starter into engine.

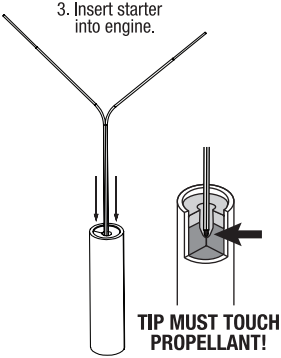

4. Tear off a small piece of recovery wadding, roll it into a small wad and insert it into the engine nozzle to hold the starter in place. Use a dowel or pencil tip to gently push the wadding into the nozzle.

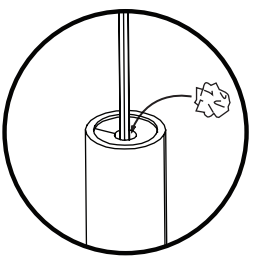

5. Lay a piece of tape over nozzle to secure in place.

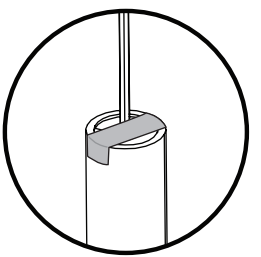

⚠ WARNING: FLAMMABLE

To avoid serious injury, read instructions & NAR Safety Code included with engines. **PREPARE YOUR ENGINE ONLY WHEN YOU ARE OUTSIDE AT THE LAUNCH SITE PREPARING TO LAUNCH.** If you do not use your prepared engine, remove the starter before storing your engine.

PN 090004-2340 (8-26)